

FS Effluent Pumping Station

The *FS Effluent* is a pre-assembled ready for use automatic pump station. To handle clean, dirty or slightly polluted water. For emptying cellars, small sumps, pumping rainwater and effluent of treatment plants and septic tanks. The standard pumping station consists of the TELKA 44 submersible pump.




Pump Features

- Stainless steel motor casing
- Coolant filled motor
- Mechanical seal
- 10 metre cable
- Float switch as standard

Tank features

- Polyethylene tank
- 300L,450L,600L capacity
- screw down lid
- 1 x 110mm/160mm inlets

- *Special audible/visual alarm control box available - ask for details*

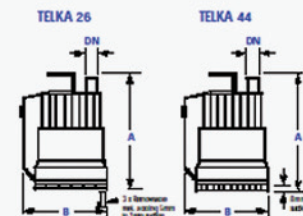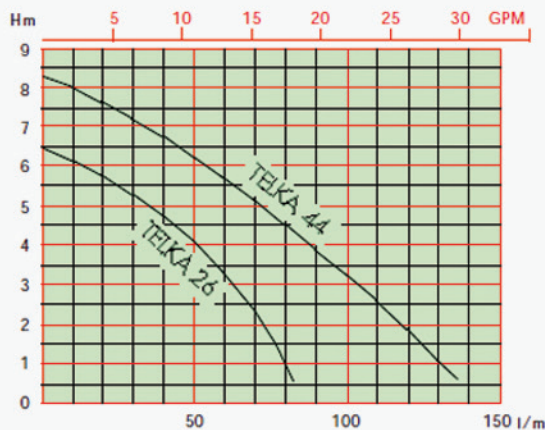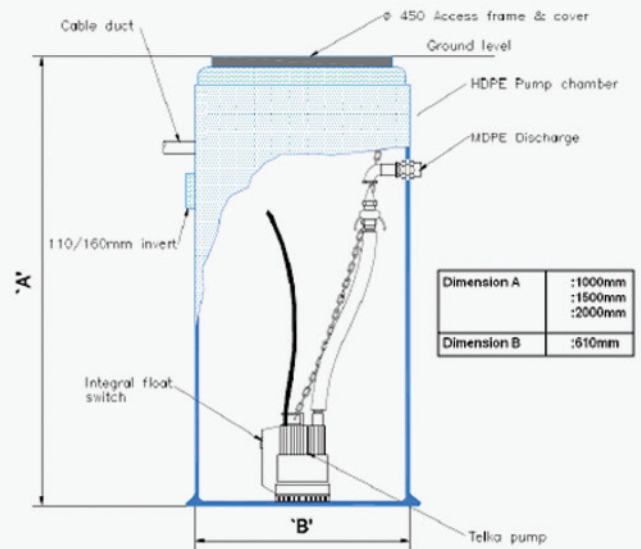

TECHNICAL DATA						
MODEL	NOMINAL		AMP	DIMENSIONS mm		
	W	HP		A	B	DN
TELKA 26	260	0.35	1.3	245	185	25
TELKA 44	420	0.55	2.0	250	190	25