


Direct Pumps & Tanks Ltd

FS Dual Sewage & Storm pumping station

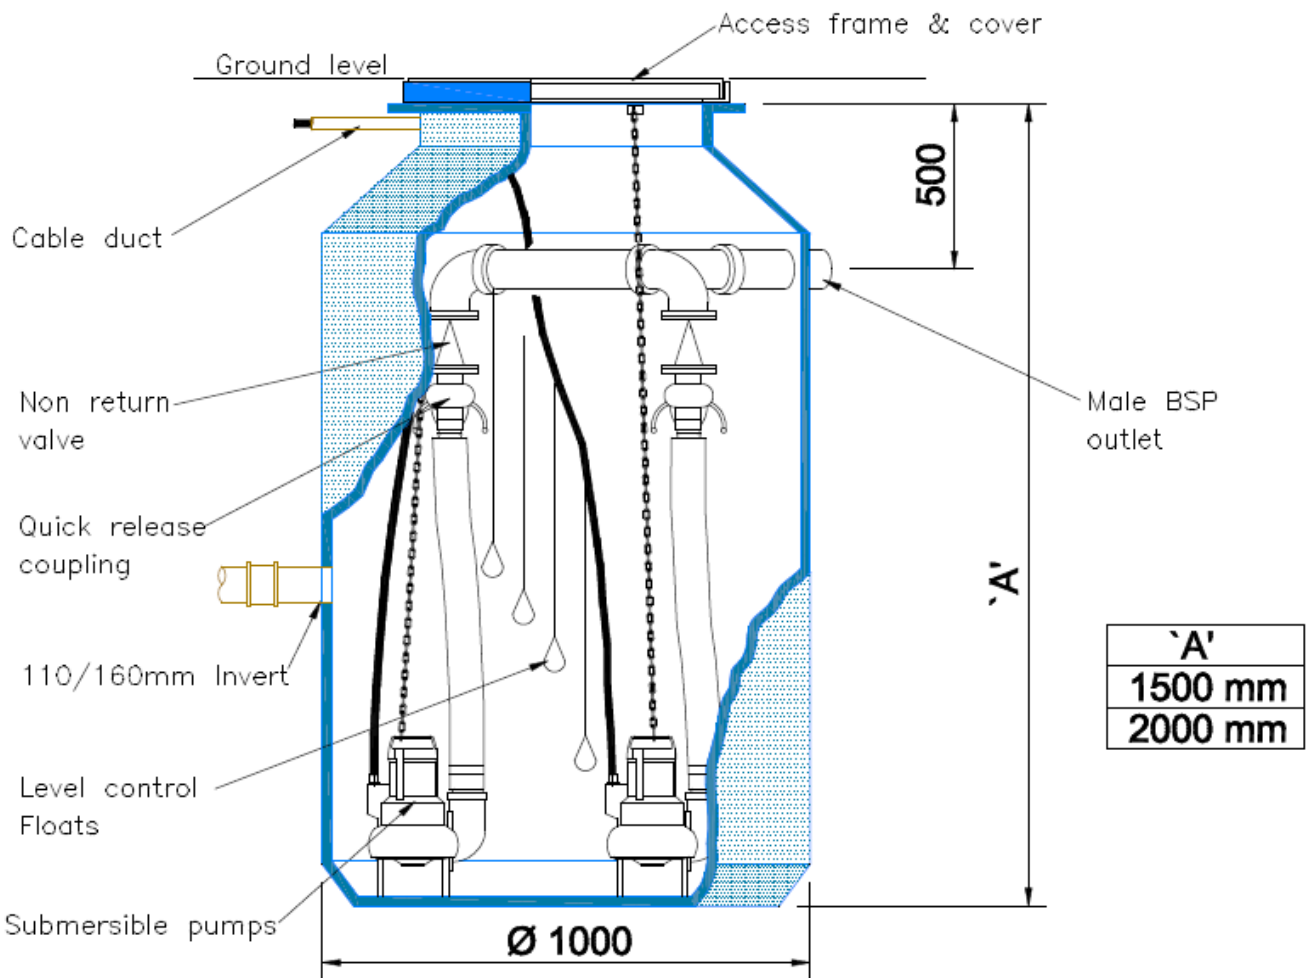


Submersible pump based on the vortex principle, suitable for pumping rain and sewage water. Heavy duty construction. Pump body, cover and support in cast iron. Back and open impellor in cast iron. Oil bathed motor with build in motor protector. shaft in stainless stell, mechanical seal in silicon carbide and lip seal ring. 10m of HO7RNF supply cable. Protection class ip68.

The tank storage capacity in the 1500mm deep tank is 1250 litres and 1700 litres on the 2000mm deep tank.

The pump station comes complete with a control panel which features automatic pump change over, thermal overload protection and high level alarm

Optional extra's include weather proof kiosk and M & E commissioning.

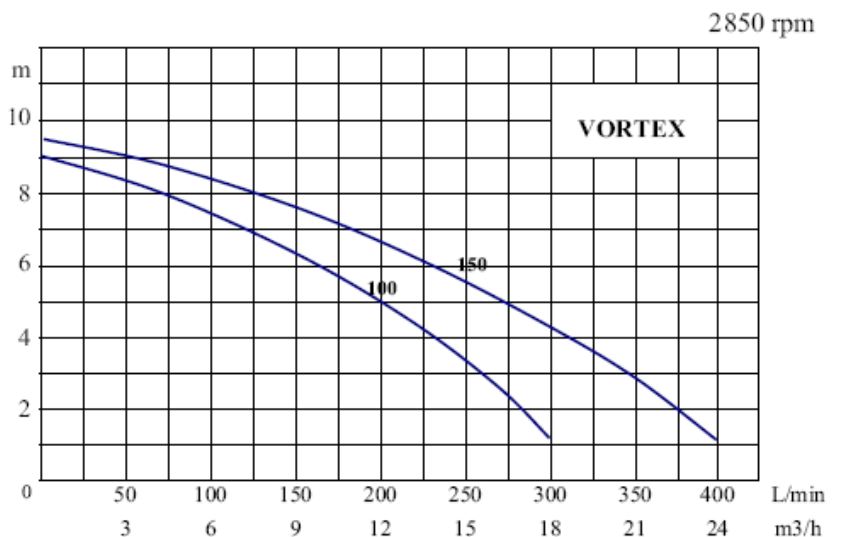

Unit 12, Cossall Industrial Estate, Ilkeston, Derbyshire, DE7 5UA

T: 0115 9444474 / 9324641. F: 0115 9442040. E: info@dpandt.co.uk